



ABRASION/MECHANICAL

ROUNDIT® 2000 NX HT


Product Highlights

- Operating temperature from -60°C to 260°C (-76°F to 500°F)
- ASD EN 6049-007
- Excellent cut-through and abrasion resistance
- Halogen-free
- Self-wrapping design
- Ideal for reworking components without disconnecting them
- Lightweight construction
- Tracer indicating the maximum operating diameter
- Aesthetic solution
- Oil and water repellent



Our manufacturing sites are certified ISO 9000, QS 9000 or ISO/TS 16949 and ISO 14001

R12000NXHT_03242009

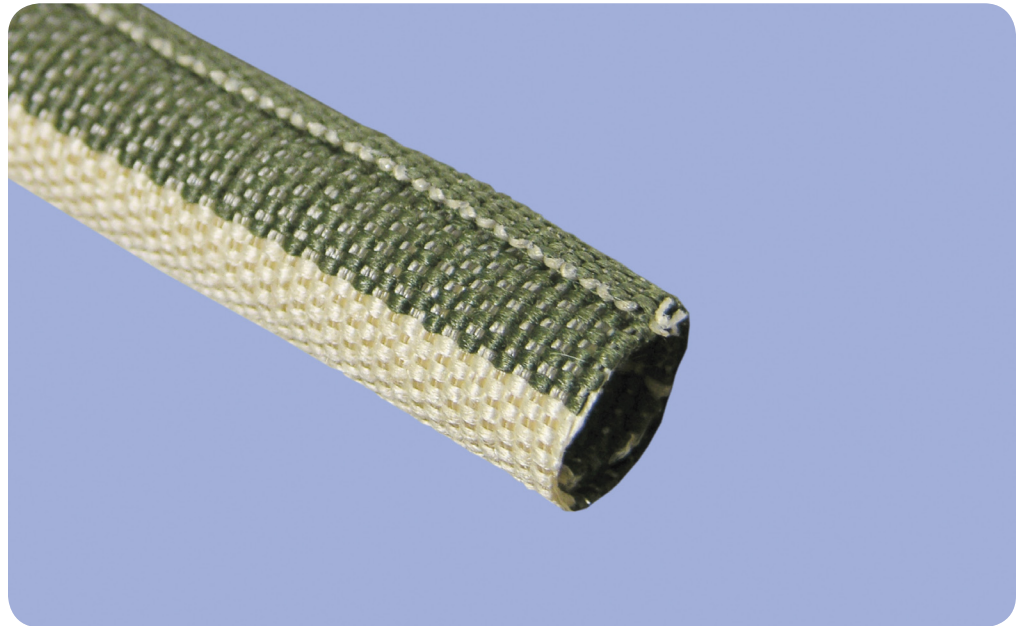

ROUNDIT® 2000 NX HT is a self-wrapping sleeve manufactured from PEEK monofilaments and Nomex* multifilaments. It includes an oil and water repellent treatment in order to prevent the absorption of condensation build-up caused by the extreme changes aircraft are subjected to. Designed for mechanical protection and maintenance of wire and cable bundles, its 100% covering ratio provides excellent cut-through and abrasion resistance.

The self-wrapping design allows for quick and easy installation and removal of the product for assembly and maintenance. ROUNDIT 2000 NX HT also accommodates break cuts.

The high temperature version is differentiated from the standard ROUNDIT 2000 NX by a wide ivory tracer on the outer side.

*Nomex is a registered trademark of "E. I. DuPont de Nemours".



As an added benefit, the patented ROUNDIT® Tool will help improve installation time and is designed to install ROUNDIT® products on cable and wire configurations.

BentleyHarris®
Protection Products

FEDERAL MOGUL
Systems Protection

A.E. Petsche Co.

Corporate Headquarters: 2112 West Division, Arlington, TX 76012-3693
817.461.9473 ph | 817.277.2887 fx | www.aepetsche.com

Performance Data – ROUNDIT® 2000 NX HT

Property	Test Method	Result
Operating temperature range	Thermal endurance & shocks	-60°C to +260°C
Classification Flammability/ smoke density/toxicity	ABD 031 & FAR 25 § 853	Conforms
Water repellent	EN 6059 Part 305	Pass
Abrasion resistance	EN 6059 Part 403	Pass
Dynamic cut-through	EN 6059 Part 405	Pass
Vibrations	DO 160B	No cable abrasion
Fluid Resistance	EN 6059-303	
Jet Fuel: JP-4 (Otan F44)		Good resistance
Hydraulic Fluid (Skydrol 500B4)		Good resistance
Mineral Oil (MIL-L-7870A)		Good resistance
Synthetic Oil (MIL-L-23699)		Good resistance
Cleaning Fluids (MIL-L-87936)		Good resistance
De-icing Fluid (MIL-A-8243)		Good resistance
Mould Growth	prEN 6059 Part 306	Pass


Product Specifications

Commercial Part Number	Recommended Application Range mm (in)		Max Weight g/m (lbs/ft)	Standard Packaging m (ft)
	Min Ø	Max Ø		
ROUNDIT 2000 NX HT 5-5	1 (1/32")	5 (3/16")	18 (0.012)	150 (492')
ROUNDIT 2000 NX HT 8-5	5 (3/16")	8 (5/16")	26 (0.017)	100 (328')
ROUNDIT 2000 NX HT 13-5	8 (5/16")	13 (1/2")	39 (0.026)	50 (164')
ROUNDIT 2000 NX HT 19-5	13 (1/2")	19 (3/4")	60 (0.040)	25 (82')
ROUNDIT 2000 NX HT 25-5	19 (3/4")	25 (1")	73 (0.049)	25 (82')
ROUNDIT 2000 NX HT 32-5	25 (1")	32 (1-1/4")	95 (0.064)	25 (82')
ROUNDIT 2000 NX HT 40-5	32 (1-1/4")	40 (1-1/2")	118 (0.079)	25 (82')

*Nominal size is determined by wrapping the product around a mandrel of a given size to obtain 90 degrees of overlap (average value).

Part Numbering System

Example	Product Name	Size	Color	Quantity
	ROUNDIT 2000 NX HT	5	5 (green)	150m



Tracer indicating the maximum operating diameter

FEDERAL MOGUL
Systems Protection

USA: (1) 800 926 2472
Europe: (33) 3 44 30 39 00
Japan: (81) 45 938 8711
China: (86) 21 5588 0898

The information and illustrations given herein are believed to be reliable. Federal-Mogul makes no warranties as to their accuracy or completeness and disclaims any liability in connection with their use. Federal-Mogul's only obligations are those in the standard term of sale for this product and Federal-Mogul will not be liable for any consequential or other damages arising out of the use or misuse of this product. Users should make their own evaluations to determine the suitability of the product for specific applications.